
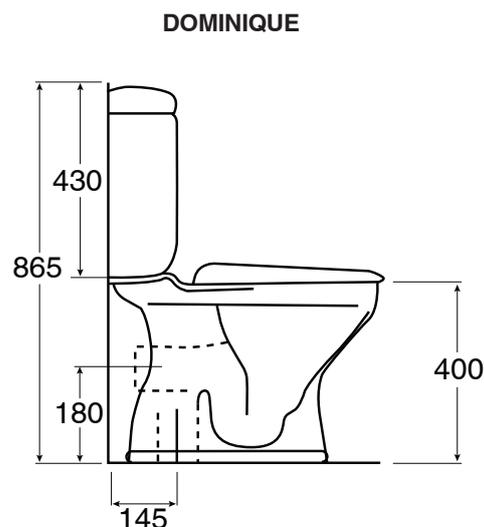


POSH


CLOSE COUPLED TOILET SUITE

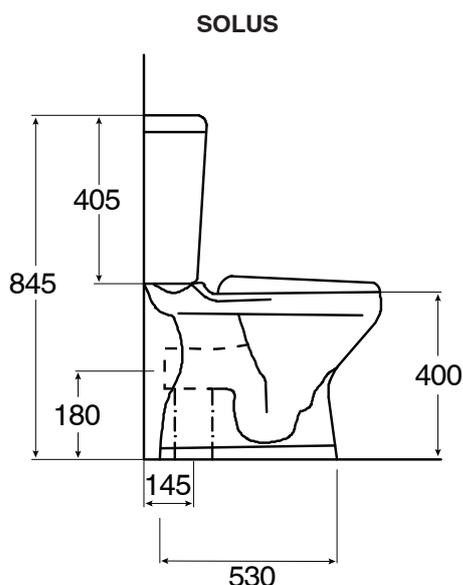

Dimensions are nominal measurements only.

SPECIFICATIONS

Recommended use	Domestic, Hotel, and Commercial	
Material	Vitreous china	
Colour	White	
Weight	Pan S Trap	23kg
	Pan P Trap	20kg
	Solus Cistern	12kg
	Dominique Cistern	14kg
Water Inlet	Bottom inlet (reversible left or right)	
Inlet Valve	Recommended maximum working pressure 500kPa	
Bowl configuration	P Trap or S Trap	
Rim Configuration	Box Rim	
Seat	Soft Close Quick Release Seat or Standard Close Seat	
Cistern Fixing	Cistern bolts directly to the pan	
Pan fixing	Pan screwed to floor using fixing bolts (not supplied) and bedded with sealant. Options - Performa S/S Pan Screws	

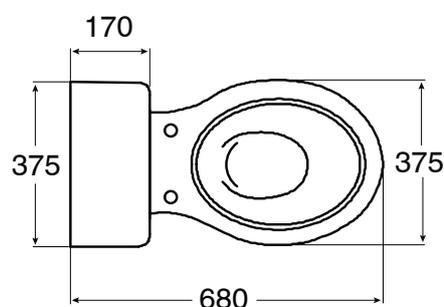

To see the complete POSH range go to
www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions.



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 2

Posh



POSH

CLOSE COUPLED TOILET SUITE

INSTALLATION INSTRUCTIONS

1. Position pan onto connector and then cistern onto pan. Check that cistern aligns with finished wall. If necessary make adjustments to pan position.
2. Mark off position of pan fixing holes, remove pan and cistern and drill holes in position marked.
3. Apply flexible sealant to base of pan and carefully position pan onto pan connector and screw pan into pre-drilled holes using corrosion resistant screws (not supplied). Remove excess sealant.
4. Place foam coupling seal over threaded outlet on bottom of cistern and remove metal washers and wing nuts.
5. Lower cistern gently onto pan locating fixing bolts into matching bolt holes on pan.
6. Secure cistern to pan by re-installing wing nuts/metal washers, alternating sides until cistern is mounted square onto pan. Do not use sealant.
7. Connect water supply to the inlet valve. (Recommended with flexible connector).
8. Fill the cistern and ensure correct water level. For adjustment refer separate instructions for inlet.
9. Fit cistern lid and flush toilet. Check for leaks. For adjustment and troubleshooting on outlet valve refer separate instructions.