

ISSY //

Z8 BUTTERFLY EXTENDED TOP VANITY UNIT



Named for its signature Zuster-designed “butterfly” handle, Z8 Butterfly pays homage to craftsmanship and bespoke design with a series of cleverly integrated luxuries. The ISSY Z8 Butterfly Vanity Unit with 2 - 4 Drawers and Left/Right Hand Extended Top can be customised to the millimetre from 1000 to 2000mm, and allows you to enjoy the ease and convenience of performing your daily ritual while sitting at your vanity.

Designed and Manufactured in Australia

SPECIFICATIONS

Recommended use	Domestic, Commercial & Hotel
Materials	Vanity Frame - Solid American Oak Bench Top - Corian
Timber Colours	American Oak, Charcoal Oak, Pony Oak , Hazelnut Oak.
Corian Colours	Glacier White, Sonora, Oyster, Deep Night Sky
Fixing	Bolted / Screwed to Wall by a Licensed Trades Person
Basin	Sold Separately



To see the complete ISSY range go to
www.reece.com.au/bathrooms

STANDARD SIZES	DRS1000(L/R)	DRS1500(L/R)
Width (mm)	1000	1200
Depth (mm)	450	450
Height (mm)	390	390
Number of Drawers	2	4
Basin Options	1	1

CUSTOM SIZES	DRS1001-1300(L/R)	DRS1350-1500(L/R)	DRS1501-1600(L/R)
Width (mm)	1001 - 1300	1350-1500	1501-1600
Depth (mm)	450	450	450
Height (mm)	390	390	390
Number of Drawers	2	4	4
Basin Options	1	1	1

CLEANING RECOMMENDATIONS

Your timber frame should be cleaned with a mild, non acidic, non abrasive detergent and soft cloth . Finish by cleaning off detergents with a soft damp cloth and towel dry. Always clean spills and water immediately. Please refrain from hanging wet towel on Ballerina bar, as this may damage the timber.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 2

ISSY // reece

ISSY //

Z8 BUTTERFLY EXTENDED TOP VANITY UNITS

COLOUR OPTIONS

TIMBER OPTIONS




AMERICAN OAK



HAZELNUT OAK




PONY OAK



CHARCOAL OAK

CORIAN OPTIONS




GLACIER WHITE



SONORA



OYSTER



DEEP NIGHT SKY




1000 - 1500 Standard (L/R)

1001 - 1600 Custom (L/R)


Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

ISSY // Z8 BUTTERFLY EXTENDED TOP VANITY UNITS


STANDARD SIZES

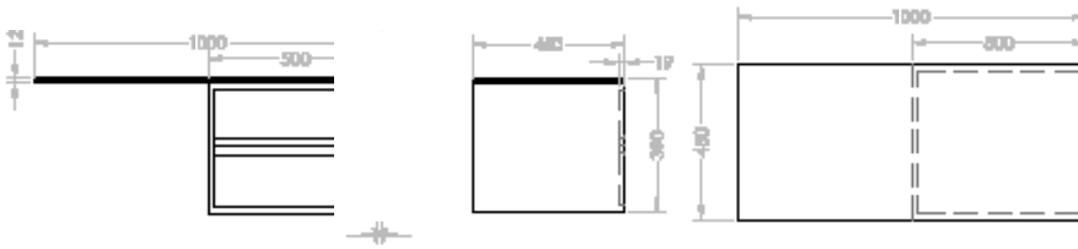


1000W X 450D X 390H LEFT DRESSER

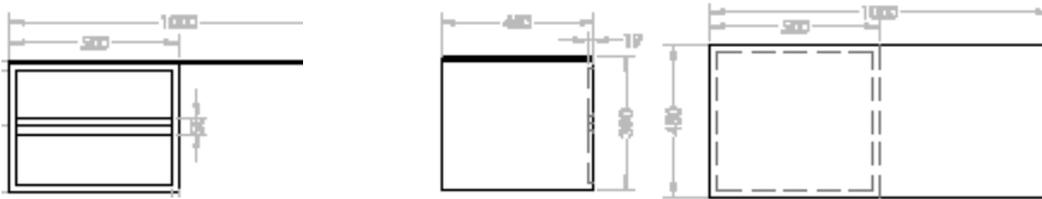

1000W X 450D X 390H RIGHT DRESSER

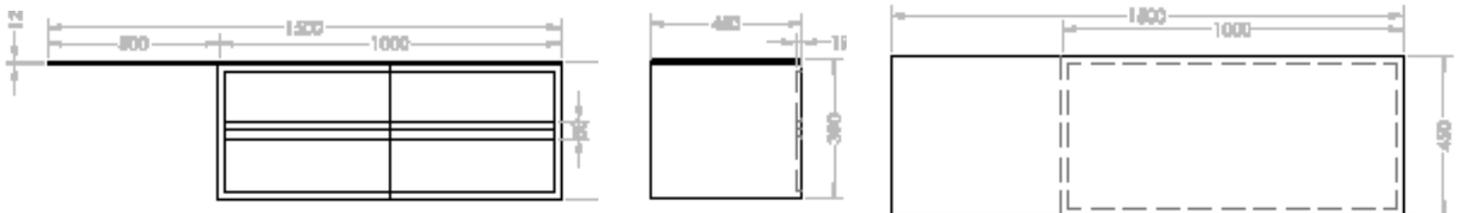


1500W X 450D X 390H LEFT DRESSER

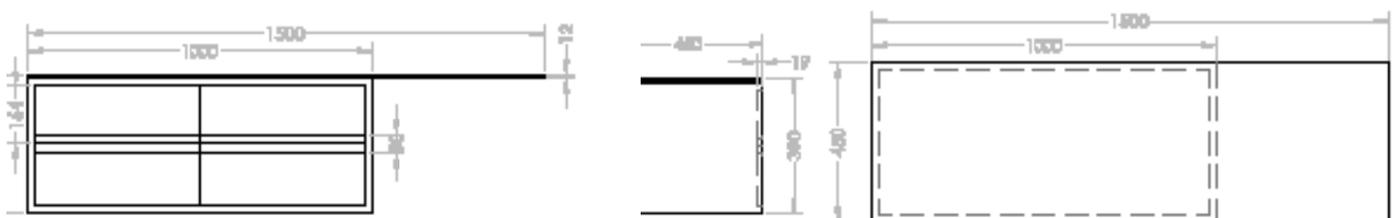


1500W X 450D X 390H RIGHT DRESSER

ISSY // Z8 BUTTERFLY EXTENDED TOP VANITY UNITS


CUSTOM SIZES

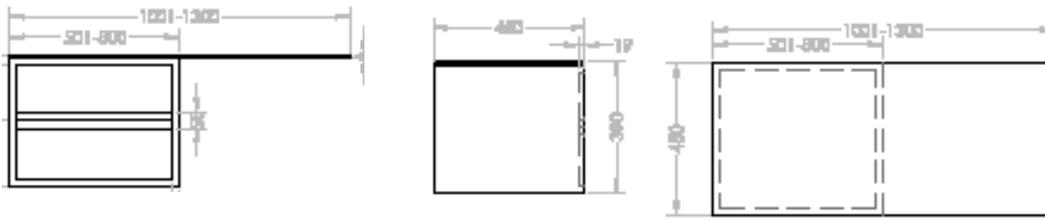


1001-1300W X 450D X 390H RIGHT DRESSER

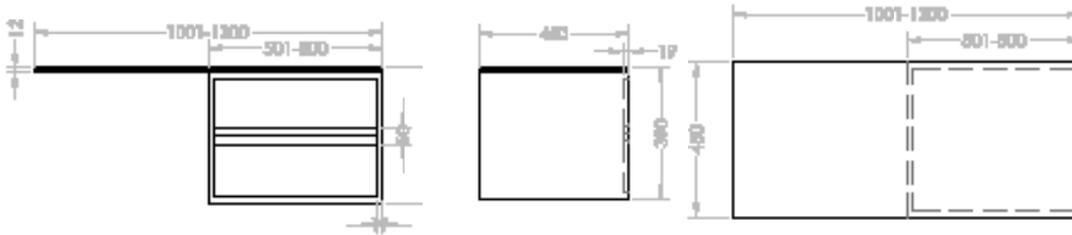


1001-1300W X 450D X 390H LEFT DRESSER

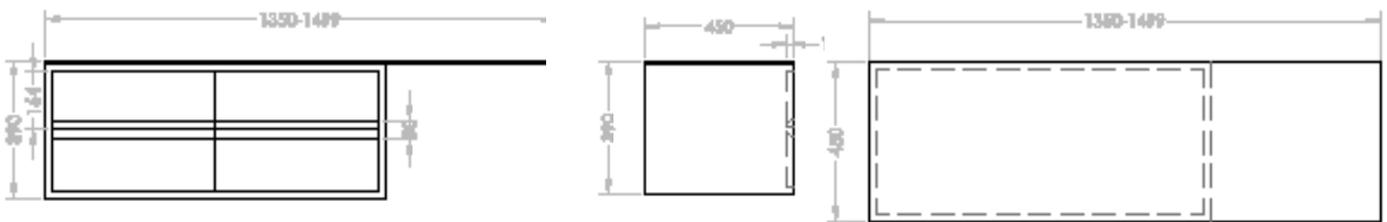


1350-1499W X 450D X 390H RIGHT DRESSER

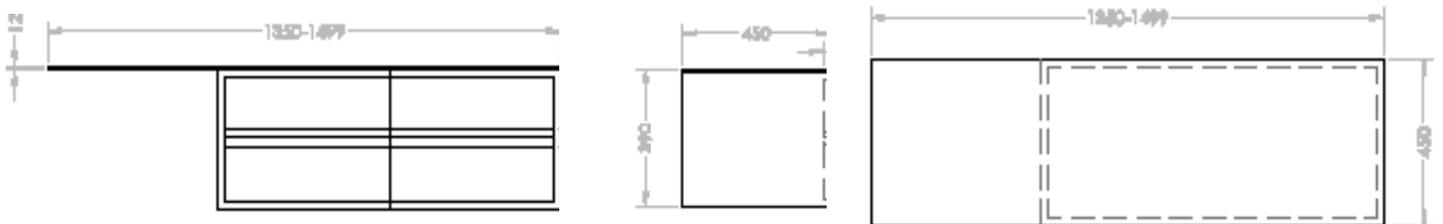

1350-1499W X 450D X 390H LEFT DRESSER

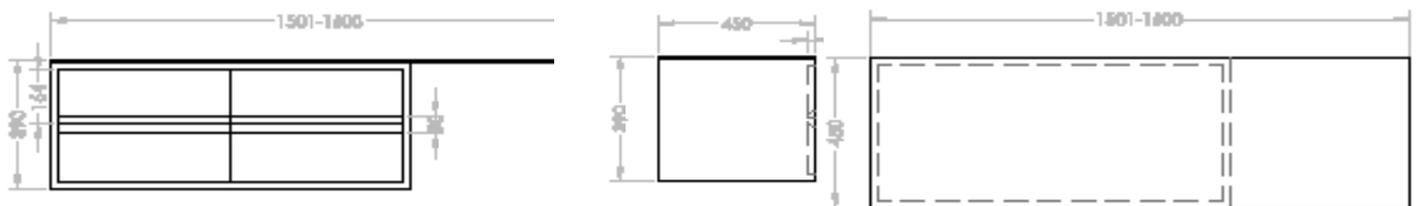

1501-1600W X 450D X 390H RIGHT DRESSER

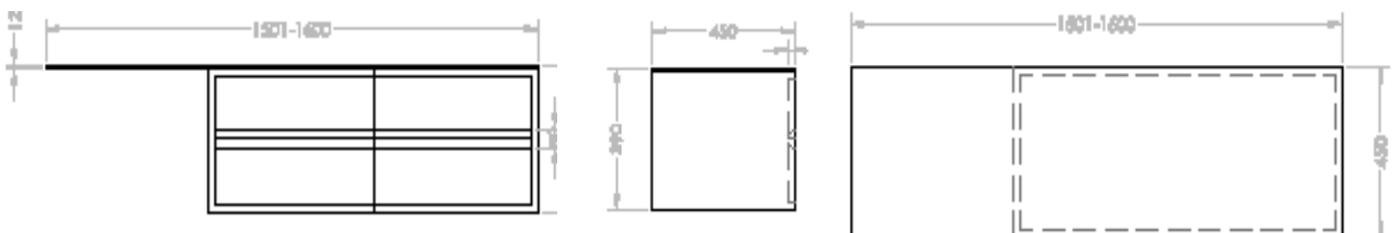

1501-1600W X 450D X 390H LEFT DRESSER

ISSY //

Z8 BUTTERFLY VANITY UNIT

VANITY FITTING INSTRUCTIONS

Vanity should be installed by a qualified, licensed trade person.

Vanity Fitting Instructions

- Prior to installation it is important to inspect the vanity to ensure no damage has occurred in transit. If damage has occurred, or a visible defect exists, do not proceed with the installation and advise supplier immediately. No warranty claim for damage will be accepted if the vanity is installed.
- Prior to installation check wall/tile surface where unit will be fitted is flat and even. Installing on uneven wall will result in the unit twisting – DO NOT PROCEED.
- It is recommended that the Solid Surface Top is protected during installation.

PLEASE NOTE: MANUFACTURER WILL NOT BE LIABLE FOR THE COST OF INSTALLATION OR REMOVAL OF THE VANITY & THE WARRANTY WILL BE VOIDED IF DAMAGE OCCURRED DURING INSTALLATION.


IF INSTALLING WITH ISSY TALLBOY PLEASE REFER TO ISSY TALLBOY INSTRUCTIONS

1. Remove drawers (refer to Drawer Installation & Adjustment instructions)
2. Mark base and back of vanity for drilling to allow for plumbing pipes.
3. Drill holes for pipes with appropriate size hole saws.
4. Position Vanity over pipes in correct position.
5. Check with spirit level that the vanity is completely level and sitting flat to wall.
6. Screw vanity to wall through back of the vanity, ENSURING SCREWS ARE FIXED TO STUDS. Allow enough fixing points at the top and bottom of the back panel to sufficiently secure the unit to the wall.
7. Replace drawers (refer to Drawer Installation & Adjustment Instructions)
8. Ensure corian is right way up. Silicon to secure and mount permanently. Additional silicone is also required on the edge of the vanity where the Corian meets the tiles/wall. If wall to wall, all four edges require Silicon.
9. Place the drawers back in unit. To do this, fully extend the drawer runner and place drawers on the guides, when pushed closed these should click together and run smoothly. If the drawers run freely, remove and repeat the step.

**Recommendation for Plumbing


Waste should not be over tightened to avoid stress on basin and top.

REMOVE DRAW

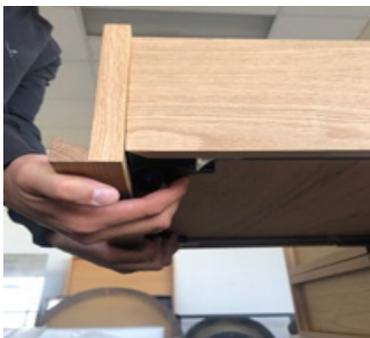


1. Fully extend drawer
2. Squeeze Clips and carefully pull drawers out.

HEIGHT ADJUSTMENT AT BACK

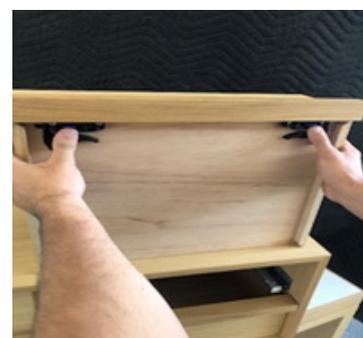

1. Roll wheels left to right to move draw up and down

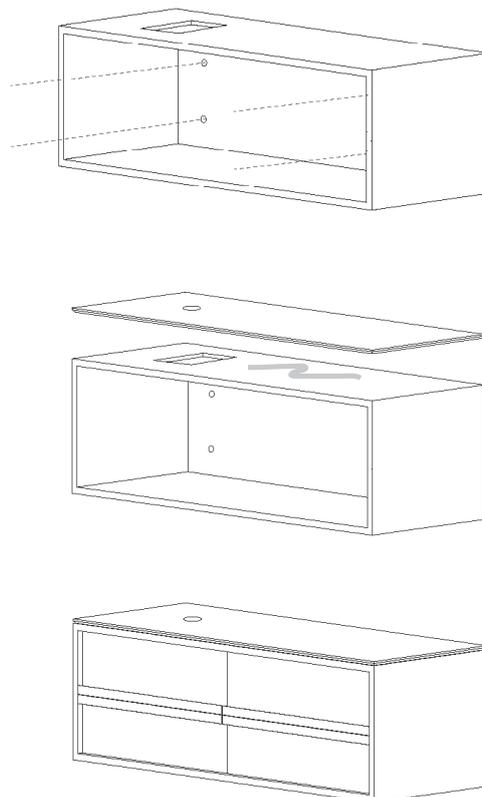

ISSY //

Z8 BUTTERFLY EXTENDED TOP VANITY UNITS

INSTALLATION INSTRUCTIONS

Tall Boy Fitting Instructions

• Prior to installation it is important to inspect the Z8 Tall Boy to ensure no damage has occurred in transit. If damage has occurred, or a visible defect exists, DO NOT proceed with installation and advise supplier immediately. No warranty claim for damage will be accepted if the Cabinet is installed. This includes scratches to the glass.


• It is recommended that the mirror is protected during installation.

Please Note: Manufacturer will not be liable for the cost of installation or removal of the mirror and the warranty will be voided if damage occurred during or after installation.

Please Note: Manufacturer will not be liable for the cost of installation or removal of the Tall Boy and the warranty will be voided if damage occurred during or after installation.

Installing the Tall Storage Unit

1. Locate the stud (you can screw through any part of the back of the unit) into the stud.
2. Drill holes and lightly countersink your screw hole to ensure a neat finish. (If it is a brick wall, you will need to use the appropriate masonry drill bits as well as a hammer drill. A toggle type system is also required (fixings not supplied)
3. Fix your unit to the wall.
4. Corian Support (4B) (Included with Z8 Extended Top Vanity) - If not already Installed, Identify which side will be adjoining with the Corian and fix into pre-drilled holes.

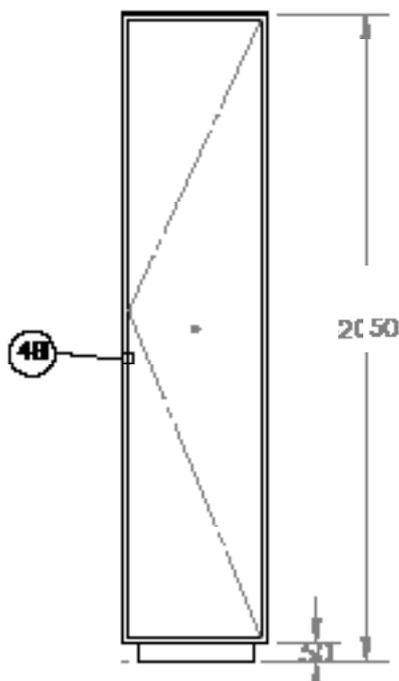

Recommendation for Plumbing

Waste should not be over tightened to avoid stress on basin and top.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

ISSY //



Z8 BUTTERFLY EXTENDED TOP VANITY UNITS

INSTALLATION INSTRUCTIONS

Installing the Shaving Cabinet

Note: It is recommended that you use an Installation stand (Not included) to assist the installation of this Shaving Cabinet. This unit being level is imperative to the Overall installation.

1. Ensure you measure correctly so that the top of the shaving cabinet aligns flush with the top of the Tall Storage Unit. DETAIL: A
2. You can drill through any part of the back of the unit into the wall. Ensure you have at least 4 points of contact to studs. These screws can be hidden with the timber plugs included.
3. If required, you can also fix the Shaving Cabinet to the Tall Storage Unit internally (again neatly drill and countersink holes before screwing together)

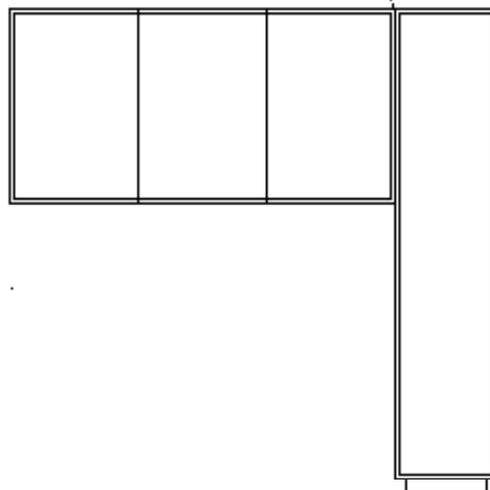



Installing the Vanity

Note: It is recommended the gap between vanity and shaving cabinet is measured at both ends to ensure level installation.

ENSURING SCREWS ARE FIXED TO STUDS Please fix Vanity Unit to studs at 4 point (minimum) for a 1000mm vanity, and 6 points for a 1500mm vanity.

1. The unit needs to be placed to line up with the plumbing system/ and the units above and below. Standard mounting height is 760mm from the ground to the top of the Corian.
2. You can drill through any part of the back of the unit into the wall. Ensure you have at least 4 points of contact to studs.

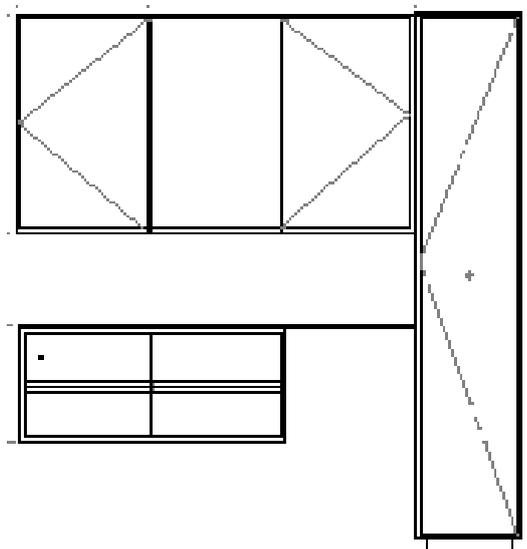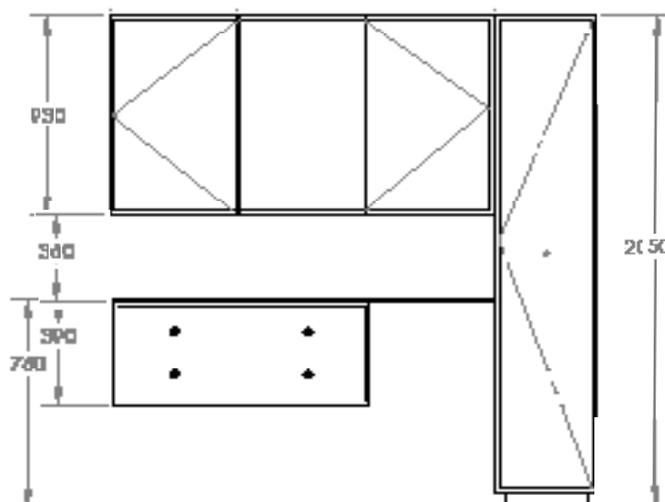

Re-attaching the Drawers

1. Fully extend the drawer runner and place drawers on the guides
2. When pushed closed these should click together and run smoothly. If the drawers do not click together or don't run freely, remove and repeat the step.